

1

2

3


4

5

6

7



2500±50

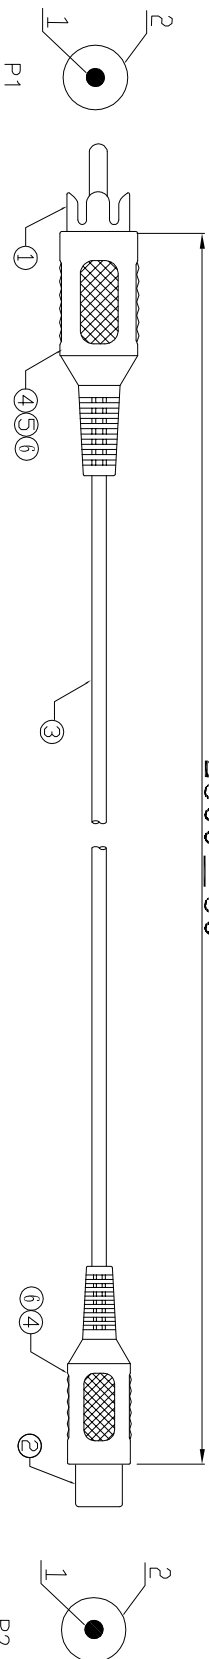

Electrical test:

- 1. 100% short, open, miss wire test
- 2. Conduct resistance: 2 Ohm(max)
- 3. Insulation resistance: 5Mohm(min)
- 4. dielectric test: DC 300V

PIN ASSIGNMENT:

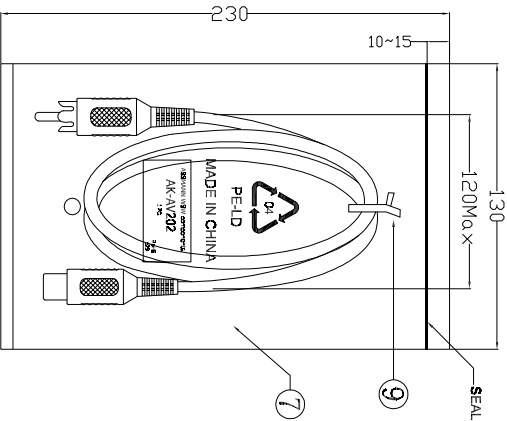

⑨	TIE	1	BLACK L=80mm
⑧	PE BAG	1/10	CLEAR PRINT BLACK"MADE IN CHINA"+"10PCS"
⑦	PE BAG	1	CLEAR PRINT BLACK"MADE IN CHINA"+"1PC"
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5"10MM
⑤	IN JACKET	0.8g	CLEAR LD-PE
④	OUT JACKET	6.6g	PVC-40P WHITE(W-182#)
③	CABLE	1	T.C (10/0.12+28/0.12)*1C OD3.0MM JACKET PVC COLOR BLACK
②	CONN	1	RCA PLUG FEMALE TYPE NI-PLATED INSULATOR COLOR:WHITE
①	CONN	1	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	

DIM	TOL

Angle	TOL

NO.	NAME	QTY	SPECIFICATION
-----	------	-----	---------------

Date	Name	Customer-No.
15.03.2017	Tom	
15.03.2018	Amy	ASSMANN WSW-No. AK-AV202

Date	Name	Customer-No.
15.03.2017	Tom	
15.03.2018	Amy	ASSMANN WSW-No. AK-AV202

Date	Name	Customer-No.
15.03.2017	Tom	
15.03.2018	Amy	ASSMANN WSW-No. AK-AV202



Drawing-No.	ASS 8222 CA	rev00
Replace		Sheet

1

2

3

4

5

6

7

A
B
C
D
E
F
G
H