

ANNA-40-3-W

~30° wide beam with 3 optics

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 40.0 mm
Height	10.7 mm
Fastening	glue, pin
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	5.3 kg
Quantity in Box	760 pcs
ROHS compliant	yes 🛈



PRODUCT DATASHEET


C11712_ANNA-40-3-W

MATERIAL SPECIFICATIONS:

Component ANNA-40-3-W **Type** Lens array **Material** PMMA Colour clear



PRODUCT DATASHEET C11712_ANNA-40-3-W

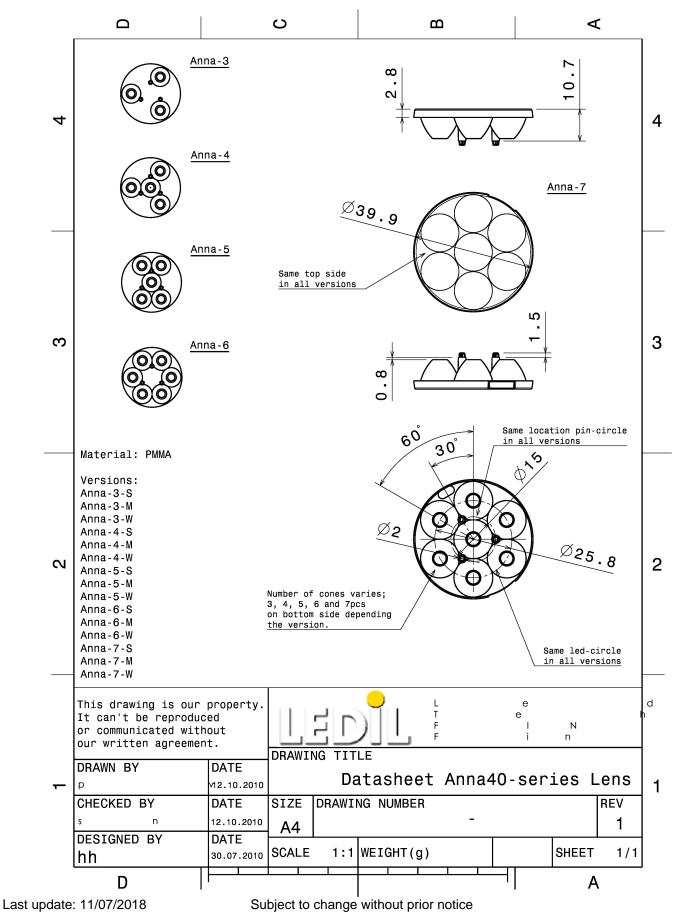

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.



PHOTOMETRIC DATA (MEASURED):

CREE -		
LED	XB-D	
FWHM	29.0°	
Efficiency	85 %	
Peak intensity		
Required com		
CREE -		 8 ³
LED	XP-E	77
FWHM	36.0°	40
Efficiency	87 %	60 ⁻
Peak intensity	1.600 cd/lm	
Required com		a, a,
		30* 30*
		 135) of 135,
CREE -	Тм	90* 90*
LED	XP-G	73
FWHM	36.0°	
Efficiency	87 %	60 ⁴
Peak intensity	2.000 cd/lm	
Required com	ponents:	
		16.99
	EDS	 201 201 201 201 201 201 201 201 201 201
LED	LUXEON A	
FWHM	34.0°	77
Efficiency	82 %	61 62
Peak intensity		90
Required com		g
	F	
		$\times / \times / \times$
		200
		an 15° 0° 35°

PRODUCT DATASHEET

C11712_ANNA-40-3-W



PHOTOMETRIC DATA (MEASURED):

UMIL	EDS	90°
LED	LUXEON Rebel	73*
FWHM	30.0°	
Efficiency	86 %	ein
Peak intensity	1.900 cd/lm	
Required comp	onents:	62* 6D0
		30 ⁻ 25 ⁻ 0 ⁻ 25 ⁻
UMIL	EDS	50°
LED	LUXEON Rebel ES	75-
FWHM	29.0°	
Efficiency	86 %	69 ⁴ 60 ⁴
Peak intensity	2.200 cd/lm	
Required comp	onents:	9. X
		100
		30° 15° 300 15° 31°
ØNICHIA		
LED	NCSxx19A	
FWHM	28.0°	
Efficiency	86 %	
Peak intensity	2.000 cd/lm	
Required comp	onents:	
ØNICHIA		
LED	NVSxx19A	
FWHM	33.0°	
Efficiency	86 %	
Peak intensity		
Required comp	onents:	

PRODUCT DATASHEET

C11712_ANNA-40-3-W



PRODUCT DATASHEET C11712_ANNA-40-3-W

PHOTOMETRIC DATA (MEASURED):

OSRAM Opto Semiconductors LED FWHM Efficiency Peak intensity Required comp	
OSRAM Depto Semiconductors LED FWHM Efficiency Peak intensity Required comp	2 ³ 0 ⁴ 0 ⁴ 0 ⁵ 0 ⁶ 0 ⁶ 0 ⁷ 0 ⁷
OSRAM Opto Semiconductors LED FWHM Efficiency Peak intensity Required comp	27 94 95 96 96 96 96 96 96 96 96 96 96



PRODUCT DATASHEET C11712_ANNA-40-3-W

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy