Rev. 11.19.08 **DA16 Series** 1 of 3

## **DA16 Series**

## 16 Watts

**Total Power:** 16 Watts Input Voltage: 90-264 Vac # of Outputs: Single

**Special Features** 

• Switching wallmount

• Available in multiple ac plug

power supply

configurations

protection

standard

compliance Constant voltage

• High efficiency

• Built in EMI filter (CISPR 22 Class B)

High MTBF

• CE Mark EMC & LVD

• Fully regulated output

• Overload and short circuit

• Designed to meet Blue Angel

• European Code of Conduct

• LED power good indicator

Universal AC input

• Thermal protection







# **Electrical Specifications**

## Input

Input range: 90-264 Vac (wide range)

Frequency: 47-63 Hz

Inrush current: 40 A @ 230 Vac, cold start @ 25 ℃

0.18 A rms @ 120 VAC: 0.36 A @ 240 VAC Input current:

Efficiency: 75% @ full load typical, @120 VAC

EMI/RFI: FCC Part 15, Subpart B Class B & EN55022

(CISPR 22) Class B & EMC89/336/EEC

Safety ground  $300 \, \mu A @ 50/60 \, Hz$ , 230 Vac input

leakage current:

#### Output

12.2 V Voltage (Vo):

Voltage regulation: ± 5% @ constant voltage mode

Maximum Power (Po): 16 W

Hold-up time: 20 ms. typical at full load @ 115 Vac

Overvoltage protection: Non-latching type

Overload protection: Output shortcircuit protection auto recover

Auto recovery

Overload protected @ 150% above maximum rating

Overtemperature

protection:

Output cable/connector

DC cable with 2.5 mm x5.5mm barrel plug barrel polarity: DC plug center +v

DC plug outer -v

# Safety

• UL 60950 / 6500 CSA 60950 60950 TUV • **NEMKO** 60950 • AS/NZS 60950

• CB Certificate and report

• **CE EMC & LVD** 





Rev. 11.19.08 DA16 Series 2 of 3

# **Environmental Specifications**

Operating temperature:  $0 \degree \text{ to } +40 \degree \text{C}$  ambient Storage temperature:  $-40 \degree \text{C}$  to  $+85 \degree \text{C}$ 

Electromagnetic Designed to meet EN55024 susceptibility:

Humidity: Operating; non-condensing 5% to 95%

RH

Vibration: Three orthogonal axes, sweep at 1 oct/

min. 5 min. dwell at four major resonances 2G peak 8 Hz to 500 Hz,

operational

MTBF demonstrated: >550,000 hours at full load and 25 °C

ambient conditions

# **AC Plug Configuration**

U.S. 2-prong	US
Europe 2-prong	EU
United Kingdom 3-prong	UK
Australia 2-prong	AU

Ordering Information								
Model Number	Maximum Power	Output Voltage	Minimum Load	Maximum Load	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PARD) <sup>3</sup>	
DA16-120US	16 W	12.2 V	0.2 A	1.33 A	1.5 A	± 3%	120 mV	
DA16-120EU	16 W	12.2 V	0.2 A	1.33 A	1.5 A	± 3%	120 mV	
DA16-120UK	16 W	12.2 V	0.2 A	1.33 A	1.5 A	± 3%	120 mV	
DA16-120AU	16 W	12.2 V	0.2 A	1.33 A	1.5 A	± 3%	120 mV	

- 1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
- 2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
- 3. Peak-to-peak with 20 mHz bandwidth and 10  $\mu F$  in parallel with a 0.1  $\mu F$  capacitor at rated line voltage and load ranges.
- 4. Minimum loads are required.

#### **Mechanical Drawing**


### DA16XX-US

# (2,000) 78.7 (10.5) 0.41 (77.0) 3.03 (75.0) 2.95 (12.7) 0.50 (1.50) 0.06

## DA16XX-AU









Rev. 11.19.08 DA16 Series 3 of 3


#### Mechanical Drawing

#### DA16-XXX-EU

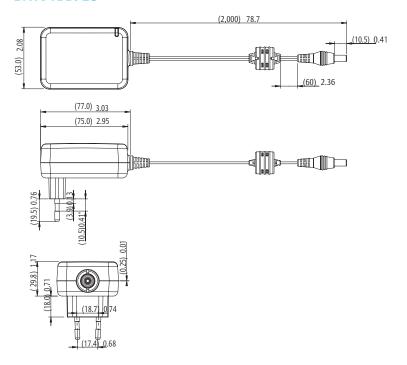

#### DA16-XXX-UK

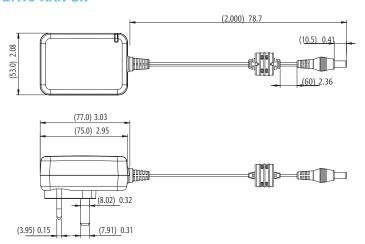



#### Notes:

- 1. Specifications subject to change without notice.
- 2. All dimensions in inches (mm), tolerance is ±.02"
- 3. Warranty: 2 year
- 4. Weight: 0.325 lb. / 0.148 kg.

#### **Americas**

5810 Van Allen Way Carlsbad, CA 92008 USA

Telephone: +1 760 930 4600 Facsimile: +1 760 930 0698

#### Europe (UK)

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom

Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

#### Asia (HK)

14/F, Lu Plaza 2 Wing Yip Street Kwun Tong, Kowloon Hong Kong

Telephone: +852 2176 3333 Facsimile: +852 2176 3888

#### For global contact, visit:

www.powerconversion.com

techsupport.embeddedpower @emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

#### **Emerson Network Power.**

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

#### EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2008 Emerson Electric Co.